

AC
220-240V
50-60Hz

DC
176-275V


DC
24V

DC
48V

LED

IP65

IK08



KM 618355
BS-EN 60598-2-22



5' \$ FHQWU@QDVSUY79 FHQWU@QDEDWJLD)99%FHQWU@QDEDWJLD

)9 9%FHQWU@QDEDWJLD

/(NRQWURONDVLDQDOLXMHVWDYQDSE1DQLDDQDEMDQLD2FKUDQDSURWLSRGELWLXEDWJLH

• 9ROLWH@JUDYDVYLHWLGODGRNFKWHSOWDGRVSRX@VP75--- WULHGDRFKUD@

SULYHJLL)9D)9 SRJLYROLWH@JVOX#QWYRSUHDSXVWH@ZOV@YHJLDCHMH

GRVWXS@ SRJLYROLWH@JVOX#QWYRSUH@H@ZOV@

52@5@P@



SELF-CONTAINED CONFIGURATION

	CODE	POWER	MODULE	AUTONOMY [h]		MODE		OPTIONS			COLOR			
STANDARD	ETE	1W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	
		2W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	
		3W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	
PREMIUM	ETE	1W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL
		2W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL
		3W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETE
STANDARD	1W	170
	2W	285
	3W	395
PREMIUM	1W	175
	2W	340
	3W	410

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ETE	1W	F	CB	CBS	X	WH	GR	BL
	2W	F	CB	CBS	X	WH	GR	BL
	3W	F	CB	CBS	X	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETE
STANDARD	1W	175
	2W	340
	3W	410

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ETE	1W	Z	CB	ADE	ADP	WH	GR	BL
	2W	Z	CB	ADE	ADP	WH	GR	BL
	3W	Z	CB	ADE	ADP	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETE
STANDARD	1W	175
	2W	340
	3W	410

FZLV SYSTEM CONFIGURATION


CODE	POWER	SYSTEM		COLOR		
ETE	1W	FZLV	FZLV2	WH	GR	BL
	2W	FZLV	FZLV2	WH	GR	BL
	3W	FZLV	FZLV2	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]


	OUTPUT [lm]	
	POWER	ETE
STANDARD	1W	175
	2W	340
	3W	410

LEGEND:

ETE	fixture EXIT M	RW	Rubic UNA Wireless central monitoring
E, C	electronic gear for STANDARD self-contained fittings	RD	DALI central monitoring
B	electronic gear for PREMIUM self-contained fittings	FZLV	central battery FZLV 24 VDC
F	electronic gear for central battery fittings	FZLV2	central battery FZLV II 48 VDC
Z	electronic gear for addressable central battery fittings	CB	central battery version
SE	non maintained	CBS	central battery for circuit monitoring
SA	maintained	ADP	address module for CBS 1.0 – SMART technology
PT	manual test button	ADE	address module for CBS 2.0 – SMART technology
X	fitting without additional options	WH	white color
AT	autotest	GR	grey color
RU	Rubic UNA central monitoring	BL	black color

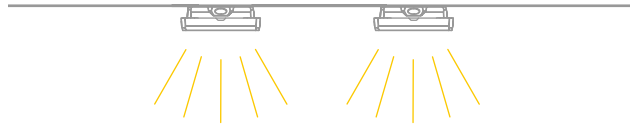

Optic for open area

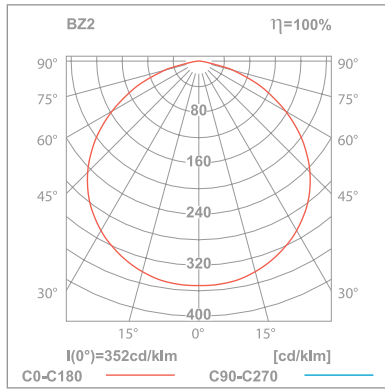

simulation for four luminaires and min 0,5 lx (area)

